

# POS Solutions

More Space System



### Innovations on track: Novus RetailSystem becomes Novus POS Solutions.


Since the company was founded in 1949, the Novus brand stands for:

- innovative technology,
- sophisticated "German Engineering",
- modular systems
- and high quality.


These attributes provide the basis for the modular Novus POS Solutions as the key to creating secure and attractive POS Solutions that are tailored to your needs with its versatile, flexible elements. Exactly this individuality is required for the checkout zone with its various demands. Our space-saving flexible products are perfectly integrable into the shop's design and enhance the user friendliness at the checkout with cleverly designed details.

On daily basis our engineers work on new solutions at the Research and Development Centre at the company headquarters in Lingen, Germany. We use advanced technology in our company's own production facilities to ensure the high quality of our products.

Let our expertise benefit your business: We design and produce solutions for you that are tailored in every detail to your specific requirements.

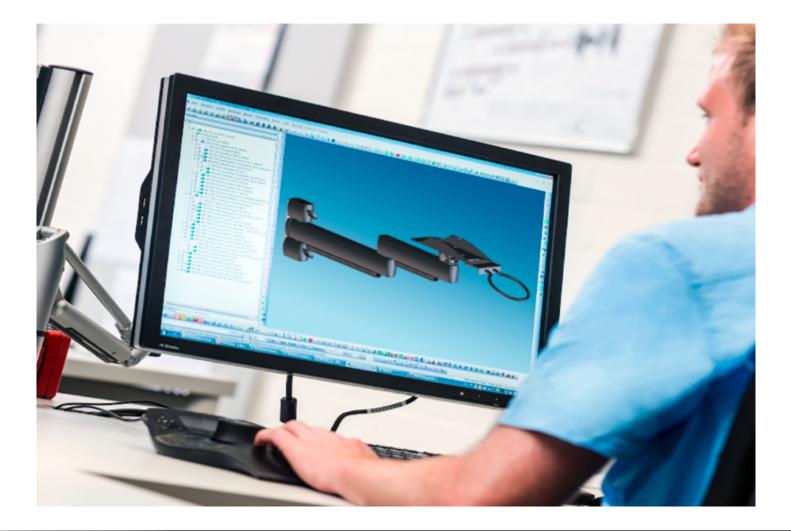

# One system – multi-purpose use

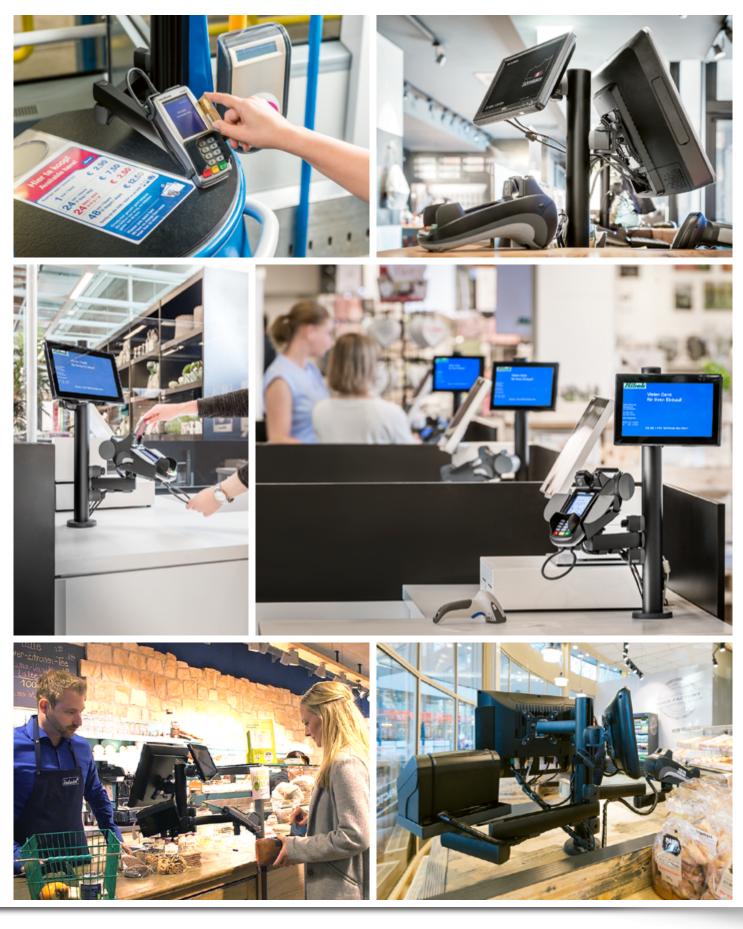



# The modular system for individual solutions at your POS.



Knowing what's important to you: our POS Solutions and its components.



Screw-on and screw-through mounting for passing cables through the table.



Infinitely height adjustable, the arms let you position terminals, keyboards and monitors individually.



High-quality silver- or black anodised aluminium profiles. Cables are passed through the inside of the column where they are covered by practical brush seals.



Practical cable holders provide a secure, neatly organised cable management along the arm.

#### The right system for any demand.





#### Mobile service perfectly integrated at the Point of Sale: Novus tablet holders.



The NOVUS TabletSafe and TabletFix expand the Novus POS Solutions with lots of practical and flexible tablet holders. Product and promotional information presented in a customer-friendly way as well as selling through mobile devices are the mark of modern customer communication and sales processes.

Whether at the point of sale or in the showroom, whether on the wall or on the counter, the versatile mounting options now provide a place for any tablet.

#### NOVUS TabletSafe





the practical apertures. If not used, they

can be closed off with cover caps.

Unobtrusive and impressively practical: the integrated lock provides secure protection against theft.

perfect cable management covers cables

from the field of view.

| NOVUS T<br>Universal, plain<br>tablet holder | Suitable for mounti<br>standard 100 x 100 a<br>connect joint  |              |   |              |  |
|--|---|--------------|---|--------------|--|
| Everythir                                    | ng in view.   |              | tablet holder for use w<br>ately 8"-10" tablets | vith various |  |
| Name Data                                    |   |              |   |              |  |
|  | System base – column for RetailSystem arms<br>NOVUS RetailSystem base 200<br>Internal cable management sealed by<br>2 sturdy brushes; 2-in-1 mounting | 851+2005+000 | 851+2009+000                                    | 200 mm       |  |
|  | NOVUS RetailSystem base 400<br>Internal cable management sealed by<br>2 sturdy brushes; 2-in-1 mounting   | 851+4005+000 | 851+4009+000                                    | 400 mm       |  |
| 11   | NOVUS RetailSystem base 600<br>Internal cable management sealed by<br>2 sturdy brushes; 2-in-1 mounting   | 851+6005+000 | 851+6009+000                                    | 600 mm       |  |
| Novus Retail                                 | System – wall brackets  |              |   |              |  |
|  | NOVUS TSS-wall bracket 445 WS<br>Wall bracket with 2 cable clasps and mounting material   | 961+0505+000 | 961+0509+000                                    | 445 mm       |  |
| NEW  | <b>NOVUS TSS-wall bracket 890 WS</b><br>Wall bracket with 2 cable clasps and mounting material  | 961+0515+000 | 961+0519+000                                    | 890 mm       |  |



| Everythir    | ng in view.   | anthracite             | silver       | Ī      | <b>├</b> → | STANDARD                      | 2     |
|--------------|---|------------------------|--------------|--------|------------|-------------------------------|-------|
| Novus Retail | System base connect – column to support Re  | etailSystem connect pl | ates         |        |            |                               |       |
| <b>\$</b>    | Novus RetailSystem base connect 100<br>Internal cable management sealed<br>by 2 sturdy brushes; 2-in-1 mounting;<br>tilt and turn   | 851+1045+000           | 851+1049+000 | 100 mm |            |                               |       |
| 4            | <b>Novus RetailSystem base connect 200</b><br>Internal cable management sealed<br>by 2 sturdy brushes; 2-in-1 mounting;<br>tilt and turn  | 851+2045+000           | 851+2049+000 | 200 mm |            |                               |       |
| Novus Retail | System – clamp bracket  |                        |              |        |            |                               |       |
| NEW          | <b>NOVUS RetailSystem clamp HD</b><br>Clamp for attachment to the counter<br>table. Suitable for the RetailSystem base<br>columns   | 795+1705+014           |              |        |            |                               |       |
| NEW          | <b>NOVUS RetailSystem clamp HD 90°</b><br>Clamp for attachment to the counter<br>table. Suitable for the RetailSystem base<br>columns   | 795+1705+015           |              |        |            |                               |       |
| Novus Retail | System arm – support arms for monitors  |                        |              |        | /          |                               |       |
| 4            | NOVUS RetailSystem arm S<br>Short, tilt and turn support arm<br>for terminals and monitors  | 852+0705+000           | 852+0709+000 |        | 70 mm      | 75/100                        | 10 kg |
|              | NOVUS RetailSystem arm M 120<br>Tilt and turn support arm<br>for terminals and monitors   | 852+2005+000           | 852+2009+000 |        | 200 mm     | 75/100                        | 10 kg |
|              | NOVUS RetailSystem arm M 200<br>Tilt and turn support arm<br>for terminals and monitors   | 852+2705+000           | 852+2709+000 |        | 270 mm     | 75/100                        | 10 kg |
|              | NOVUS RetailSystem arm M330-C<br>Support arm 330 mm for terminals and<br>screens, additional connector for connect<br>plate, swivelling and tiltable                                | 852+4005+001           | 852+4009+001 |        | 330 mm     | 75/100                        | 10 kg |
|              | NOVUS RetailSystem arm L 380<br>2-part articulated tilt and turn sup-<br>port arm for terminals and monitors,<br>additional connector for connect plate,<br>swivelling and tiltable | 853+4505+000           | 853+4509+000 |        | 450 mm     | 75/100                        | 10 kg |
|              | NOVUS RetailSystem arm S-TV<br>Short support arm for large monitors,<br>can be swivelled  | 852+0545+000           | 852+0549+000 |        | 50 mm      | 100/100<br>200/100<br>200/200 | 25 kg |
|              | NOVUS RetailSystem arm M-TV<br>Support arm for large monitors,<br>can be swivelled  | 852+2145+000           | 852+2149+000 |        | 210 mm     | 100/100<br>200/100<br>200/200 | 20 kg |
|              | NOVUS RetailSystem Display holder 75  | 852+0705+001           |              |        | 65 mm      | 75                            | 5 kg  |

# The Novus RetailSystem

|               |  | anthracite       | silver       | ⊢ł           | ٢     |
|---------------|--|------------------|--------------|--------------|-------|
| Novus RetailS | ystem connect – support arms for RetailSysten  | n connect plates |              |              |       |
|               | NOVUS RetailSystem connect M 120<br>Support arm for connect plates;<br>tilt and turn   | 852+2035+000     | 852+2039+000 | 140 mm       | 10 kg |
|               | NOVUS RetailSystem connect M 200<br>Support arm for connect plates;<br>tilt and turn   | 852+2835+000     | 852+2839+000 | 220 mm       | 10 kg |
|               | NOVUS RetailSystem connect L 380 D<br>2-part support arm for connect plates;<br>tilt and turn; downwards assembled   | 853+4525+000     | 853+4529+000 | 400 mm       | 10 kg |
|               | NOVUS RetailSystem connect L 380<br>2-part support arm for connect plates;<br>tilt and turn  | 853+4535+000     | 853+4539+000 | 400 mm       | 10 kg |
| NEW           | NOVUS RetailSystem connect XL 750<br>3-part support arm 750 mm for RetailSystem<br>connect plates, swivelling and tiltable   | 853+7505+000     | 853+7509+000 | 750 mm       | 5 kg  |
| NEW           | NOVUS RetailSystem connect L415 D-M right<br>2-part support arm 160/220 mm for<br>terminals and screens, additional connector<br>for connect plate, swivelling and tiltable,<br>mounting standard 75/100       | 853+4825+001     | 853+4829+001 | 160 / 220 mm | 10 kg |
| NEW           | <b>NOVUS RetailSystem connect L415 D-M left</b><br>2-part support arm 160/220 mm for<br>terminals and screens, additional connector<br>for connect plate, swivelling and tiltable,<br>mounting standard 75/100 | 853+4825+002     | 853+4829+002 | 160 / 220 mm | 10 kg |

|               |   | black        | silver / anthracite |        |        |
|---------------|---|--------------|---------------------|--------|--------|
| Novus Retails | System monitor arm Clu  |              |                     |        |        |
| NEW           | <b>NOVUS Clu I without mount</b><br>1-piece gas pressure arm for flat-screens<br>without mount, QuickRelease, mounting<br>standard 75/100 | 990+1008+000 | 990+1009+000        | 283 mm | 2-7 kg |
| New           | <b>NOVUS Clu column adapter</b><br>Clu column for NOVUS MY, TSS and<br>RetailSystem base  | 898+0098+000 | 898+0099+000        |        |        |



| - |
|---|

Connecting plate for keyboards









Connecting plates for EC-Cash terminals



Connecting plate for printers and scanners



Accessories

| Novus RetailSystem connect plate – connecting plate for keyboards                       |                  |
|---|------------------|
| NOVUS Keyboard (supporting surface / B x L: 300 x 150 mm), large                        | 851+0035+004     |
| NOVUS Keyboard (supporting surface / B x L: 300 x 120 mm), small                        | 851+0035+021     |
| Novus RetailSystem connect plate – connecting plates for EC-Cash terminals              |                  |
| NOVUS Ingenico ICT 250/220  | 851+0035+011     |
| NOVUS Ingenico IPP 350/310  | 851+0035+009     |
| NOVUS Ingenico Lane 5000  | NEW 851+0035+043 |
| NOVUS Ingenico Desk 3200 / 3500 / 5000  | NEW 851+0035+046 |
| NOVUS Ingenico IPP350 without handle  | 851+0035+022     |
| NOVUS Ingenico IPP 480  | 851+0035+020     |
| NOVUS Spire SPp30   | 851+0035+027     |
| NOVUS Verifone VX 520 / H5000   | 851+0035+014     |
| NOVUS Verifone VX 820   | 851+0035+012     |
| NOVUS Verifone VX 825   | NEW 851+0035+037 |
| NOVUS Verifone MX 925   | NEW 851+0035+034 |
| NOVUS Verifone H 5000   | NEW 851+0035+001 |
| NOVUS Verifone P 400  | NEW 851+0035+038 |
| NOVUS Verifone P 400 without handle   | NEW 851+0035+042 |
| NOVUS Verifone V 200C / V 400C  | NEW 851+0035+039 |
| NOVUS Verifone V 400M   | NEW 851+0035+040 |
| NOVUS Verifone M 400  | NEW 851+0035+041 |
| NOVUS Worldline Yomani ML+XR Touch  | 851+0035+007     |
| Novus RetailSystem connect plate – connecting plates for printers, scanners and standar | rd connections   |
| NOVUS Aures ODP 333   | 851+0035+033     |
| NOVUS Epson TM-T70  | 851+0035+024     |
| NOVUS Epson TM-T20II (also for Casio UP-400)  | 851+0035+005     |
| NOVUS Magelan 1100i   | 851+0035+003     |
| NOVUS Orbit MS 7120   | 851+0035+006     |
| NOVUS Printer I (for PartnerTECH RP 100 / RP 300 / RP 600, TM-T20II, LK-TE322)          | 851+0035+008     |
| NOVUS Scanner NLS-FR 4060   | 851+0035+026     |
| NOVUS Universal 160x200   | 851+0035+023     |
| NOVUS Universal 183x216   | 851+0035+013     |
| NOVUS Standard mounting 75/75   | 851+0035+029     |
| NOVUS Standard mounting 75/100  | 851+0035+025     |
| IOVUS Kronos  | 851+0035+030     |
| NOVUS Sam4S Giant 100   | NEW 851+0035+044 |
| Novus RetailSystem Accessories  |                  |
| NOVUS RetailSystem cable strap black, 2x velcro cable ties for cable management         | 851+0008+001     |
| NOVUS Cable clips for RetailSystem, set of 5, black                                     | NEW 795+0505+000 |
| NOVUS RetailSystem lock silver/anthracite, Tenon lock with cable, including 2x keys     | 851+0009+000     |
| NOVUS RetailSystem Baseplate X, anthracite  | 795+1705+001     |
| NOVUS QuickRelease, mounting standard 75/100  | 795+9095+000     |

## The Novus RetailSystem

|               |  | anthracite*         | silver**           | white***       | Ţ       | STANDARD |       |
|---------------|--|---------------------|--------------------|----------------|---------|----------|-------|
| Novus Tablet  | Safe – lockable tablet holder for Android / A  | pple devices (for i | Pad 1/2/3/4 and if | Pad Air/Air 2) |         |          |       |
|               | <b>NOVUS RetailSystem TabletSafe iPad</b><br>Lockable tablet holder for Apple devices<br>(for iPad 1/2/3/4 and iPad Air/Air 2),<br>for portrait and landscape use, with<br>aperture for function buttons and cable<br>management | 881+1318+000        | 881+1308+000       | 881+1301+000   |         |          |       |
|               | NOVUS RetailSystem TabletSafe Android<br>Lockable tablet holder for Android<br>tablets, for portrait and landscape use,<br>with aperture for function buttons and<br>cable management  | 881+0318+000        | 881+0308+000       | 881+0301+000   |         |          |       |
| 114           | <b>NOVUS RetailSystem TabletFix</b><br>Suitable for tablet sizes 8" - 10"  | 881+3115+000        |                    |                |         |          |       |
| Novus TabletS | Safe – stands  |                     |                    |                |         |          |       |
| *             | <b>NOVUS DeskStand 200</b><br>For standing on desks, with brush seals<br>for internal cable management   | 882+0205+000        | 882+0209+000       |                | 200 mm  |          |       |
| -             | <b>NOVUS FloorStand 1000</b><br>For standing on floors, with brush seals<br>for internal cable management  | 882+1005+000        | 882+1009+000       |                | 1000 mm |          |       |
| Novus TabletS | Safe – mounts  |                     |                    |                |         |          |       |
|               | <b>NOVUS WallMount</b><br>Practical mount for connecting Tablet-<br>Safe to the wall, with fixed tilting of 33<br>degrees  | 882+0035+000        |                    |                |         |          |       |
| Υ.            | <b>NOVUS ScreenMaster 100</b><br>For mounting the TabletSafe flat against<br>the wall  |                     | 940+1009+000       |                |         | 75/100   | 25 kg |
|               | <b>NOVUS Sky WallMount</b><br>Wall mount with QuickRelease,<br>load bearing capacity of up to 10 kg,<br>mounting standard 75/100   | 950+0019+100        |                    |                |         | 75/100   | 10 kg |
|               | <b>NOVUS QuickMount</b><br>Wall mount with QuickRelease,<br>load bearing capacity of up to 25 kg,<br>mounting standard 75/100  | 931+0255+000        |                    |                |         | 75/100   | 25 kg |

\* TabletSafe with frame and trim in anthracite

\*\* TabletSafe with frame in silver and trim in anthracite

\*\*\* TabletSafe with frame in silver and trim in white







#### We realise your project:

For individual, tailormade solutions and developments please contact us at Phone: +49 (0) 591-9140415 or e-mail: info@novus-dahle.com

Novus Dahle GmbH Novus More Space System Breslauer Straße 34 – 38 49808 Lingen (Ems), Germany Phone +49 (0) 591 9140-0 Fax +49 (0) 591 9140-841 info@novus-dahle.com

www.novus-dahle.com

