

# 230-0240 product-specification

luminaire name: NOVUS Attenzia complete  
 article number: 730+21\*\*+000\* colour temperature 3000 K  
 740+21\*\*+000\* colour temperature 4000 K



\*US versions carry different article#

**parameters:**

luminaire luminous flux 1.708 lm  
 luminaire light efficiency 83,3 lm/W  
 colour rendering Ra > 85  
 collorated colour temperature 4.000 K  
 colour tolerance 3 SDCM  
 lamp type 108 x LED  
 operating unit electronical plug transformer  
 connected loads 100-240 V, 50-60 Hz  
 connection line ca. 2 m, euro plug (US version different)  
 system power ca. 20 W  
 weighted energy consumption 20 kWh/1.000h  
 operating element TouchDIM at lamphead  
 glare-free reflector  
 housing at the luminaire head aluminium die casting  
 safety certification ENEC



**light distribution:**

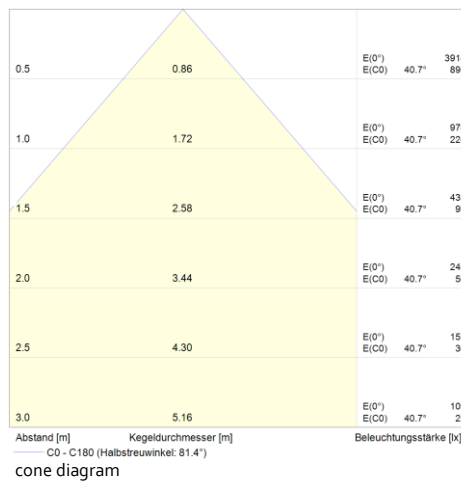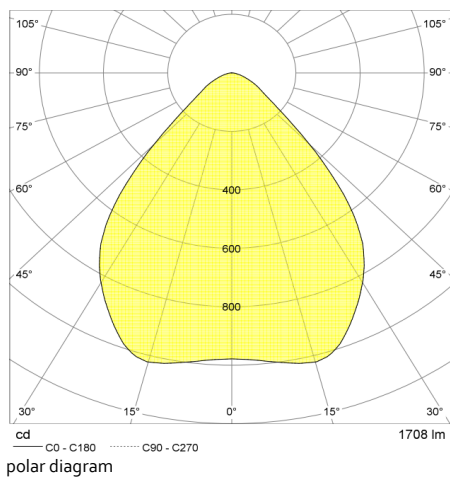

**illuminance according to DIN 5035-8:**

minimum illuminance  $E_{min} = 690 \text{ lx}$   
 maximum illuminance  $E_{max} = 2530 \text{ lx}$   
 average illuminance  $E_{av} = 1.714 \text{ lx}$   
 uniformity g2 0,273  
 uniformity g3 0,482  
 cut-off  $30^\circ$

