

230-0239 product-specification

luminaire name: NOVUS Attenzia task
 article number: 730+12**+000* colour temperature 3000 K
 740+12**+000* colour temperature 4000 K



*US versions carry different article#

parameters:

luminaire luminous flux 918 lm
 luminaire light efficiency 106,8 lm/W
 colour rendering Ra > 84
 correlated colour temperature 4.000 K
 colour tolerance 5 SDCM
 lamp type 49 x LED
 operating unit electronic plug transformer
 connected loads 100-240 V, 50-60 Hz
 connection line ca. 2 m, euro plug (US version different)
 system power ca. 9 W
 weighted energy consumption 9 kWh/1.000h
 operating element TouchDIM at lamphead
 glare-free reflector
 housing at the luminaire head aluminium die casting
 safety certification ENEC



light distribution:

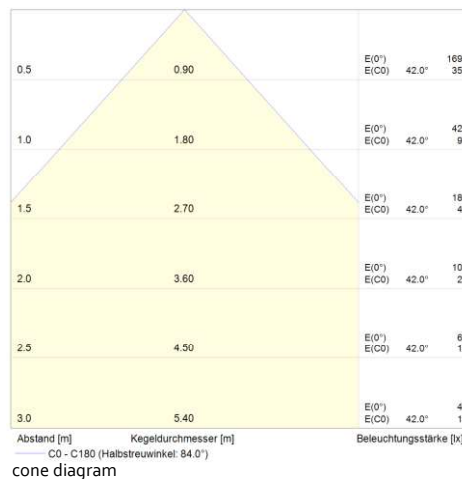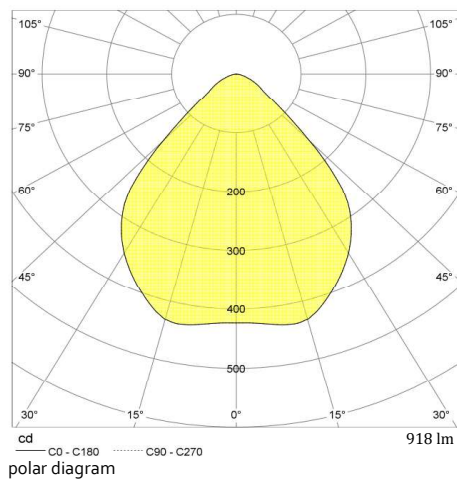

Illuminance according to DIN 5035-8:

minimum illuminance $E_{min} = 536 \text{ lx}$
 maximum illuminance $E_{max} = 3.174 \text{ lx}$
 average illuminance $E_{av} = 1.568 \text{ lx}$
 uniformity g2 0,169
 uniformity g3 0,401
 cut-off 30°

