

Innovative workspace solutions

More space and perfect light in the office
with the Novus More Space System!




WE MAKE WORK EASIER

Since 2002, we have been manufacturing high-quality products under the Novus More Space System brand to provide freedom, improve efficiency and optimise the ergonomics of your workstation. You benefit from many years of experience in development and production of premium office equipment with all products. Novus More Space System – engineering made in Germany. Novus develops products in Germany. You can rest assured that all our products are developed in accordance with the European quality standard and with German precision.


The Novus More Space System makes it easy to work efficiently and comfortably. Our monitor holders, task lights and notebook holders give structure to the workstation and help to keep your desk organised. The innovative workstation systems by Novus are space-saving and flexible to use on any desk. Height-adjustable monitor holders and good lighting create an ergonomic workstation to help keep you healthy at work.

Our mission: We make work easier!

This brochure contains just a taste of what the Novus More Space System full range has to offer. Find out more at: www.novus-more-space-system.com

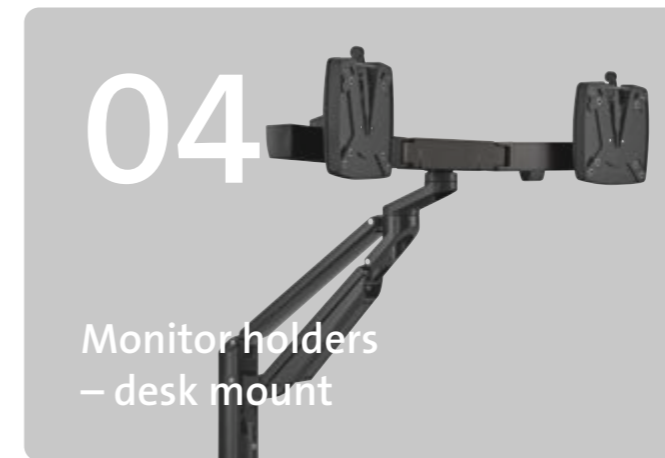

MPS

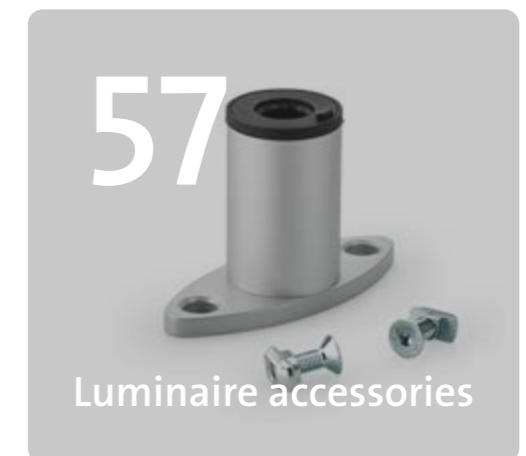

Monitor holders

– desk mounts

An individual approach to
working environment!





FIND THE BEST MONITOR HOLDER FOR YOU

Applications

Basic: For small and lightweight monitors in the office or at home

Office: Professional solutions for all workstations with up to two screens. The ergonomic and efficient all-rounder for screens up to 27 inches.

Office: The powerful solution for large, heavy screens. Up to three screens can be ergonomically attached to one support arm.

Technical Workspace: The modular system for efficiently attaching up to eight monitors to one workstation. The specialist for challenging environments, such as control rooms, terminals or broker workstations.

Monitor holder series

NOVUS MY 2.0



NOVUS Clu



NOVUS Clu Plus



NOVUS TSS



Colour

Silver

Silver, white, black

Silver, white, black

Silver, anthracite from 20 units

Number of screens possible

1-2




1-2



1-3



1-8

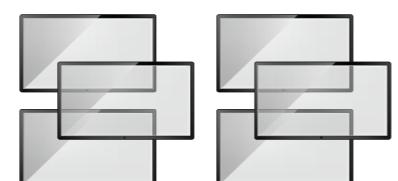

Maximum screen capacity (per support arm)




Monitor adjustment

static

dynamic

dynamic

static

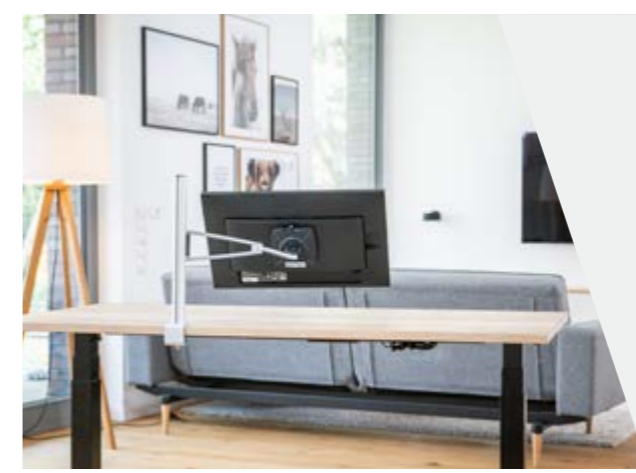

NOVUS MY 2.0

NOVUS MY 2.0 – small but excellent. Our Punkt Novus MY 2.0 series is the perfect solution for almost any device, whether it's a classic monitor up to 5 kg, notebook or tablet. Ideal for a tidy desk in your home office and creating space for the important things.

NOVUS Clu

Novus Clu – perfect for you! The all-round monitor holder with gas spring for screens up to 7 kg: our flexible Novus Clu monitor holders allow you to customise your workstation with up to two monitors.



NOVUS Clu Plus

NOVUS Clu Plus – feel the freedom! Our sturdy Novus Clu Plus monitor holders can accommodate two or even three monitors at once, positioned exactly as you need them. The monitor holders allow you to ergonomically adjust large curved displays and other large monitors up to 15 kg flexibly and with ease!



NOVUS TSS

NOVUS TSS – for a secure hold! The heavy duty solution among our monitor holders! Holders from our professional Novus TSS series are extremely sturdy and able to withstand heavy loads, perfect for screens up to 15 kg! The column system is specially developed for technically demanding workstations and comes in a clever modular design – the possibilities are endless!



It comes down to your health!

FOR BETTER WORKPLACE ERGONOMICS



QUICK AND EASY

The ball-joint and pivot joints in all of our series allows the monitors to be used in both landscape and portrait format, meaning even more flexibility when using multiple monitors!


EXEMPLARY ERGONOMICS

For Novus, it's all about you. Our products are all designed to allow for maximum flexibility in arranging workspaces that are perfectly tailored to everyone's personal needs (e.g. varifocal wearers).



TOUCH IT

Modern life in the office is on the move! Horizontal positioning for using touch screens is no problem at all with the Novus Clu and MY 2.0 series!

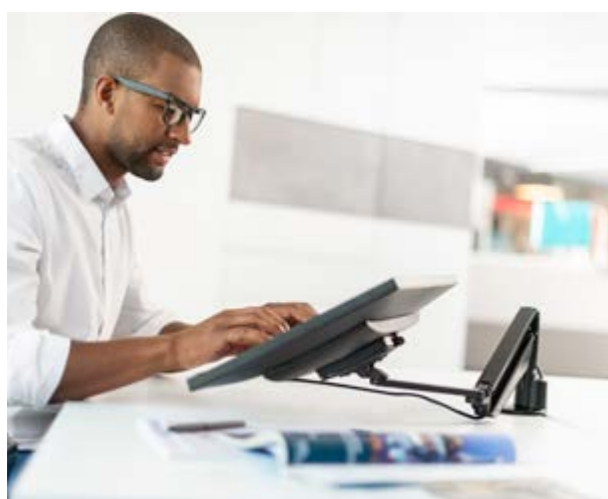

PERFECT PANORAMA

Whether it's two monitors or six monitors, our multi-monitor solutions offer an almost seamless screen surface for all kinds of monitor designs.


STANDING OVATIONS

The Novus articulated arms do not protrude beyond the back edge of the desk, making it easier to arrange height-adjustable work desks in blocks or against acoustic partitions, even for double workstations.




TEAMWORK

Monitor holders from the dynamic Novus Clu series can be quickly adjusted to meet the individual needs of all users in just one step. The monitors can also be rotated 360°, perfect for consultations and other interactive meetings.

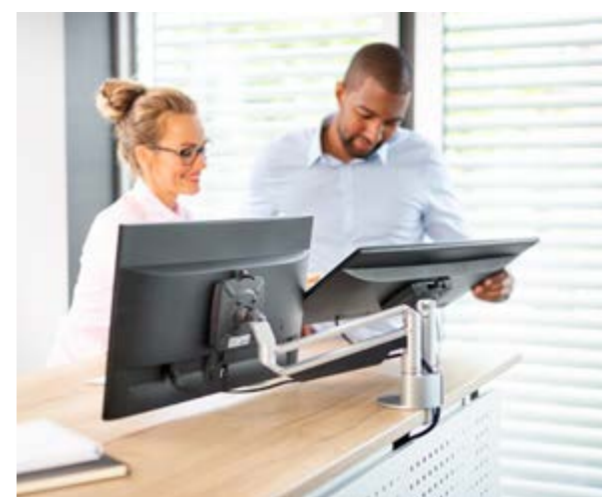

MORE SPACE ON YOUR DESK!

It comes down to office efficiency!

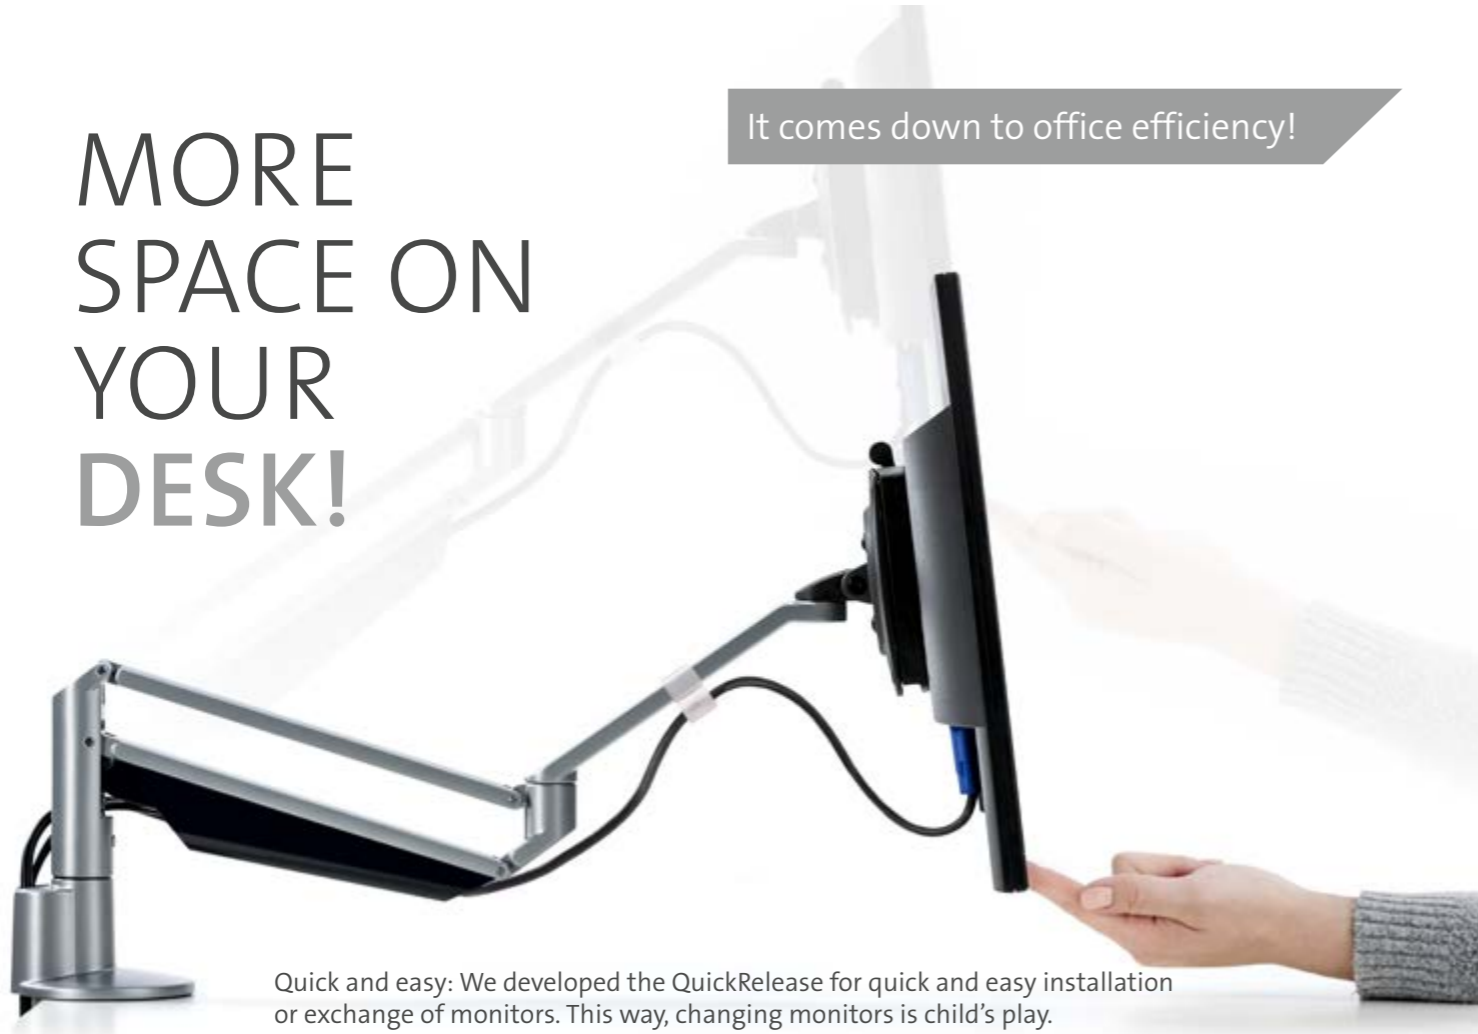

Quick and easy: We developed the QuickRelease for quick and easy installation or exchange of monitors. This way, changing monitors is child's play.

Clever cable guide: Our Novus monitor holders keep all connecting cables neat, tidy and partially hidden. No more annoying tangled cables on the desk!

Stylish: The Novus Clu series is available in three colours (white, black, silver), allowing for seamless integration into your office interior or giving you the chance to add some stylish accents.



MORE SUPPORT AT THE WORKSTATION

Whatever installation method you prefer and no matter the limitations of your office furniture system, we offer system clamp, grommet and drilling screw mounts as standard to fix your equipment firmly in place. Attach rail systems, organisation walls, acoustic panels and much more without a problem – just get in touch!

Mount type	NOVUS MY 2.0	NOVUS Clu / Clu Plus	NOVUS TSS
System clamp			
Drilling screw mount			
Grommet mount			
System rail mount			
Wall mount / Novus SlatWall mount			
Special office partition clamp			
Pin adapter			
Column adapter			

3-in-1 mount

Find more information on these and other mounts at www.novus-more-space-system.com

More freedom of movement needed?




Free yourself with our modular monitor holders!

100% flexible. 100% adjustable.



NOVUS MY one plus 2.0




- Elegant monitor holder with infinitely height adjustable folding arm
- Combination of MY base 400 and MY arm 2.0 – for more design, flexibility and dynamics at the workplace
- New cross joint with pivot function for working in vertical format
- Closed mount for a tidy rear side
- Suitable for VESA standard 75/100 mm
- Monitor arm infinitely adjustable in height, tilt and rotation
- Combinable with NOVUS MY tab and NOVUS Quick Release
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Table mount with grommet and drilling screw fitting for a tabletop thickness of 5–70 mm
- System rail mount for use in various system rails of the office furniture industry

Art.No.	910+6019+000	910+6059+000	910+6069+000
Mounting option	System clamp	Drilling screw fitting Cable port mount	System rail attachment
Color	 silver	 silver	 silver
Capacity (monitor weight)	5 kg	5 kg	5 kg
Maximum monitor size	approx. 24 inches; approx. 530 mm	approx. 24 inches; approx. 530 mm	approx. 24 inches; approx. 530 mm
Range	415 mm	415 mm	415 mm
Height of the column	400 mm	400 mm	400 mm



NOVUS MY twin arm 2.0

- Elegant monitor holder with two infinitely height adjustable folding arms
- Combination of MY base 400 and two MY arm 2.0 – attractive appearance with maximum flexibility in the positioning of two monitors
- New cross joint with pivot function for working in vertical format
- Closed mount for a tidy rear side
- Suitable for VESA standard 75/100 mm
- Monitor arm infinitely adjustable in height, tilt and rotation
- Combinable with NOVUS MY tab and NOVUS Quick Release
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Table mount with grommet and drilling screw fitting for a tabletop thickness of 5–70 mm
- System rail mount for use in various system rails of the office furniture industry




Art.No.	910+6619+000	910+6659+000	910+6669+000
Mounting option	System clamp	Drilling screw fitting Cable port mount	System rail attachment
Color	 silver	 silver	 silver
Capacity (monitor weight)	2 x 5 kg	2 x 5 kg	2 x 5 kg
Maximum monitor size	approx. 24 inches; approx. 530 mm	approx. 24 inches; approx. 530 mm	approx. 24 inches; approx. 530 mm
Range	415 mm	415 mm	415 mm
Height of the column	400 mm	400 mm	400 mm





NOVUS Clu I c, with table mount




- Elegant 1-part monitor support arm with gas spring technology for a comfortable, ergonomic adjustment of the monitor
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Adjustable inhibition
- The pivot function allows you to use monitors in both portrait and landscape format.
- Quick and easy mounting
- Flexible 3-in-1 table mount for clamp, cable port or drilling screw, for a tabletop thickness of 10–50 mm

Art.No.	990+1011+000	990+1018+000	990+1019+000
Mounting option	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)
Color	 white	 black	 silver
Capacity (monitor weight)	2-7 kg	2-7 kg	2-7 kg
Maximum monitor size	approx. 27 inches; approx. 600 mm	approx. 27 inches; approx. 600 mm	approx. 27 inches; approx. 600 mm
Range	283 mm	283 mm	283 mm
Rotation	180° / 360°	180° / 360°	180° / 360°



NOVUS Clu II c, with table mount

- Elegant 2-part monitor supporting arm with gas spring technology for comfortable, ergonomic monitor adjustment
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Adjustable inhibition
- The pivot function allows you to use monitors in both portrait and landscape format.
- Quick and easy mounting
- Flexible 3-in-1 table mount for clamp, cable port or drilling screw, for a tabletop thickness of 10–50 mm




Art.No.	990+2011+000	990+2018+000	990+2019+000
Mounting option	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)
Color	 white	 black	 silver
Capacity (monitor weight)	2-7 kg	2-7 kg	2-7 kg
Maximum monitor size	approx. 27 inches; approx. 600 mm	approx. 27 inches; approx. 600 mm	approx. 27 inches; approx. 600 mm
Range	433 mm	433 mm	433 mm
Rotation	180° / 360°	180° / 360°	180° / 360°





NOVUS Clu III C, with table mount




- Elegant 2-part monitor supporting arm with gas spring technology for comfortable, ergonomic monitor adjustment
- Particularly suitable for varifocal wearers and touch displays, as the horizontal arm element allows the monitor to be positioned at a particularly low height
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Adjustable inhibition
- The pivot function allows you to use monitors in both portrait and landscape format.
- Quick and easy mounting
- Flexible 3-in-1 table mount for clamp, cable port or drilling screw, for a tabletop thickness of 10–50 mm

Art.No.	990+3011+000	990+3018+000	990+3019+000
Mounting option	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)
Color	 white	 black	 silver
Capacity (monitor weight)	2-7 kg	2-7 kg	2-7 kg
Maximum monitor size	approx. 27 inches; approx. 600 mm	approx. 27 inches; approx. 600 mm	approx. 27 inches; approx. 600 mm
Range	457 mm	457 mm	457 mm
Rotation	180° / 360°	180° / 360°	180° / 360°



NOVUS Clu Plus C, with table mount

- Powerful 2-part monitor arm with gas spring technology for comfortable, ergonomic monitor adjustment
- This is perfect for use with large and heavy screens, such as modern curved screens
- QuickRelease for easy and convenient monitor mounting, suitable for VESA standard 75/100
- Adjustable inhibition
- Height adjustment range 300 mm (VESA centre 150 mm to 450 mm above tabletop)
- The pivot function allows you to use monitors in both portrait and landscape format.
- Quick and easy mounting
- Flexible 3-in-1 table mount for clamp, cable port or drilling screw, for a tabletop thickness of 10–50 mm

Art.No.	991+3011+000	991+3018+000	991+3019+000
Mounting option	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)
Color	 white	 black	 silver
Capacity (monitor weight)	6-15 kg	6-15 kg	6-15 kg
Maximum monitor size	approx. 40 inches	approx. 40 inches	approx. 40 inches
Range	525 mm	525 mm	525 mm
Rotation	180° / 360°	180° / 360°	180° / 360°






Clu Plus: The powerful solution for large and heavy monitors. Find out more at www.novus-more-space-system.com/clu



NOVUS Clu Duo C, with table mount




- The dual-monitor solution with gas spring for easy, ergonomic monitor adjustment
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Adjustable inhibition
- The pivot function allows you to use monitors in both portrait and landscape format.
- Quick and easy mounting
- Flexible 3-in-1 table mount for clamp, cable port or drilling screw, for a tabletop thickness of 10–50 mm

Art.No.	990+4011+000	990+4018+000	990+4019+000
Mounting option	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)
Color	 white	 black	 silver
Capacity (monitor weight)	2 x 2 to 7 kg	2 x 2 to 7 kg	2 x 2 to 7 kg
Maximum monitor size	approx. 27 inches; max. 638 mm	approx. 27 inches; max. 638 mm	approx. 27 inches; max. 638 mm
Range	333 mm	333 mm	333 mm
Rotation	180° / 360°	180° / 360°	180° / 360°



NOVUS Clu Duo XL C, with table mount

- The dual-monitor solution with gas spring for easy, ergonomic monitor adjustment
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Adjustable inhibition
- The pivot function allows you to use monitors in both portrait and landscape format.
- Quick and easy mounting
- Flexible 3-in-1 table mount for clamp, cable port or drilling screw, for a tabletop thickness of 10–50 mm




Art.No.	990+4011+001	990+4018+001	990+4019+001
Mounting option	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)
Color	 white	 black	 silver
Capacity (monitor weight)	2 x 2 to 7 kg	2 x 2 to 7 kg	2 x 2 to 7 kg
Maximum monitor size	approx. 32 inches; max. 838 mm	approx. 32 inches; max. 838 mm	approx. 32 inches; max. 838 mm
Range	433 mm	433 mm	433 mm
Rotation	180° / 360°	180° / 360°	180° / 360°





NOVUS Clu Plus X2 C, with table mount

- Powerful 2-part monitor arm with gas spring technology for comfortable, ergonomic adjustment of two monitors
- Dual-monitor crossbar with adjustable viewing angle for concave monitor positioning
- QuickRelease for easy and convenient monitor mounting, suitable for VESA standard 75/100
- Adjustable inhibition
- Height adjustment range 300 mm (VESA centre 180 mm to 480 mm above tabletop)
- Quick and easy mounting
- Flexible 3-in-1 table mount for clamp, cable port or drilling screw, for a tabletop thickness of 10–50 mm

Art.No.	992+2011+000	992+2018+000	992+2019+000
Mounting option	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)
Color	 white	 black	 silver
Capacity (monitor weight)	2 x 2,5-7 kg	2 x 2,5-7 kg	2 x 2,5-7 kg
Maximum monitor size	approx. 27 inches; max. 650 mm	approx. 27 inches; max. 650 mm	approx. 27 inches; max. 650 mm
Range	375 mm	375 mm	375 mm
Rotation	180° / 360°	180° / 360°	180° / 360°






Clu Plus: The powerful solution for large and heavy monitors. Find out more at www.novus-more-space-system.com/clu



NOVUS Clu Plus X3 C, with table mount

- Powerful 2-part triple monitor arm with gas spring technology for comfortable, ergonomic adjustment of three monitors
- Triple-monitor crossbar with adjustable viewing angle for concave monitor positioning
- QuickRelease for easy and convenient monitor mounting, suitable for VESA standard 75/100
- Adjustable inhibition
- Height adjustment range 300 mm (VESA centre 180 mm to 480 mm above tabletop)
- Quick and easy mounting
- Flexible 3-in-1 table mount for clamp, cable port or drilling screw, for a tabletop thickness of 10–50 mm

Art.No.	993+2011+000	993+2018+000	993+2019+000
Mounting option	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)
Color	 white	 black	 silver
Capacity (monitor weight)	3x1,5-4,5 kg	3x1,5-4,5 kg	3x1,5-4,5 kg
Maximum monitor size	approx. 27 inches; max. 650 mm	approx. 27 inches; max. 650 mm	approx. 27 inches; max. 650 mm
Range	375 mm	375 mm	375 mm
Rotation	180° / 360°	180° / 360°	180° / 360°






Clu Plus: The powerful solution for large and heavy monitors. Find out more at www.novus-more-space-system.com/clu

NOVUS Clu Notebook combination C, with table mount



- The perfect solution for notebook workstations with gas spring for comfortable, ergonomic adjustment of monitors and notebooks
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Adjustable inhibition
- Quick and easy mounting
- Flexible 3-in-1 table mount for clamp, cable port or drilling screw, for a tabletop thickness of 10–50 mm


Art.No.	990+4511+000	990+4518+000	990+4519+000
Mounting option	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)	System clamp, drilling screw or cable port mount (3-in-1)
Color	 white	 black	 silver
Capacity (monitor weight)	2 x 2 to 7 kg	2 x 2 to 7 kg	2 x 2 to 7 kg
Maximum monitor size	approx. 32 inches; approx. 710 mm	approx. 32 inches; approx. 710 mm	approx. 32 inches; approx. 710 mm
Range	333 mm	333 mm	333 mm
Rotation	180° / 360°	180° / 360°	180° / 360°



NOVUS TSS Single folding arm II




- The practical set for the correct ergonomic use of a monitor at the workstation
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm

Art.No.	220+0250+000
Mounting option	System clamp
Color	 silver / anthracite
Capacity (monitor weight)	10 kg
Maximum monitor size	approx. 32 inches; approx. 710 mm
Range	450 mm
Rotation	270°
Height of the column	445 mm



NOVUS TSS Basic

- Novus bestseller for ergonomically correct use of the flat screen at your workstation
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm


Art.No.	220+0050+000
Mounting option	System clamp
Color	 silver / anthracite
Capacity (monitor weight)	12 kg
Maximum monitor size	approx. 32 inches; approx. 710 mm
Range	505 mm
Rotation	270°
Height of the column	445 mm





NOVUS TSS Duo folding arm II


- The simple double screen solution of the Tetra Support System
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm

Art.No.	220+0270+000
Mounting option	System clamp
Color	 silver / anthracite
Capacity (monitor weight)	10 kg
Maximum monitor size	approx. 34 inches; max. 780 mm
Range	450 mm
Height of the column	445 mm



NOVUS TSS Duo Telescope

- The space-saving dual-monitor solution of the NOVUS Tetra Support System for mounting near walls or at two workstations facing each other
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm


Art.No.	220+0260+000
Mounting option	System clamp
Color	 silver / anthracite
Capacity (monitor weight)	11 kg
Maximum monitor size	approx. 32 inches; max. 732 mm
Range	400 mm
Height of the column	445 mm



NOVUS TSS Duo folding arm III




- Twin screen solution with the Novus Tetra-Support-System.
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm

Art.No.	220+0060+000
Mounting option	System clamp
Color	 silver / anthracite
Maximum monitor size	approx. 37 inches; max. 890 mm
Range	505 mm
Rotation	270°
Height of the column	445 mm



NOVUS TSS Trio Telescope

- The solution for three screens at a workstation allows even more productivity
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Range: TSS telescopic arm III XL 700 476–724 mm / support carriage 105 mm
- Drilling screw fitting HD, for desktop thickness 15-70 mm


Art.No.	220+0300+000
Color	 silver / anthracite
Capacity (monitor weight)	31 kg
Maximum monitor size	approx. 30 inches; max. 665 mm
Range	476 - 724 mm
Rotation	270°
Height of the column	445 mm






NOVUS TSS Quattro telescope


- 4 screens – no problem for the NOVUS Tetra-Support-System!
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Drilling screw fitting HD, for desktop thickness 15-70 mm

Art.No.	220+0310+000
Color	 silver / anthracite
Capacity (monitor weight)	40 kg
Maximum monitor size	approx. 30 inches; max. 680 mm
Range	314 - 400 mm
Rotation	270°
Height of the column	845 mm



NOVUS Control Center


- Everything in view – the monitor bridge of the NOVUS Tetra Support System for 4 flat screens
- Range: TSS folding arm III 505 mm / SlatWall-support carriage 110 mm
- Suitable for VESA standard 75/100 mm
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Size SlatWall over the desk: 1200 x 445 mm

Art.No.	220+0130+000
Mounting option	System clamp
Color	 silver / anthracite
Capacity (monitor weight)	22 kg
Maximum monitor size	approx. 32 inches; approx. 710 mm
Range	505 mm
Rotation	270°
Height of the column	445 mm



NOVUS TSS Sextett Telescope

- six flat screens, no problem for the NOVUS Tetra-Support-System
- Range: TSS telescopic arm III XL 700 476–724 mm / support carriage 105 mm
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Drilling screw fitting HD, for desktop thickness 15-70 mm


Art.No.	220+0320+000
Color	 silver / anthracite
Capacity (monitor weight)	48 kg
Maximum monitor size	approx. 30 inches; max. 665 mm
Range	476 - 724 mm
Rotation	270°
Height of the column	845 mm





NOVUS Business Combination


- Optimal set for your notebook workstation
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Range: TSS folding arm III 505 mm / TSS notebook holder 589 mm
- Suitable for VESA standard 75/100 mm
- Column attachment: system clamp 1, clamping length 14-40 mm

Art.No.	220+0070+000
Mounting option	System clamp
Color	 silver / anthracite
Capacity (monitor weight)	7 kg
Maximum monitor size	approx. 32 inches; approx. 710 mm
Range	505 mm
Rotation	270°
Height of the column	445 mm



NOVUS TSS Wall Station

- Special applications demand special solutions - the NOVUS Tetra-Support-System for wall mounting
- Range: TSS support carriage 105 mm / keyboard holder 528 mm
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100

Art.No.	220+0100+000
Mounting option	wall mount
Color	 silver / anthracite
Capacity (monitor weight)	15 kg
Rotation	180°
Height of the column	890 mm



Novus POS Solutions



Your point-of-sale solution for retail, hotel, theater, restaurant or airport.

Monitor holders

– organisation wall

An individual approach to working environment!



NOVUS Clu I SW, with SlatWall mount

- Elegant 1-part monitor support arm with gas spring technology for a comfortable, ergonomic adjustment of the monitor
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- The pivot function allows you to use monitors in both portrait and landscape format.
- Obligatory supplement is a SlatWall element
- Integrated SlatWall universal adapter for easy mounting with a central screw fitting for mounting in a single or double slot

Art.No.	990+1071+000	990+1078+000	990+1079+000
Mounting option	Organisation wall mount	Organisation wall mount	Organisation wall mount
Color	white	black	silver
Capacity (monitor weight)	2-7 kg	2-7 kg	2-7 kg
Maximum monitor size	approx. 27 inches; approx. 600 mm	approx. 27 inches; approx. 600 mm	approx. 27 inches; approx. 600 mm
Range	314 mm	314 mm	314 mm
Rotation	180°	180°	180°



NOVUS SlatWall-support carriage




- High-quality monitor support carriage for mounting a monitor directly to an organisational wall
- For mounting in a single slot
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- 60° swivelling range for any chosen viewing angle
- Obligatory supplement is a SlatWall element

Art.No.	963+0119+013
Color	 silver / anthracite
Capacity (monitor weight)	10 kg
Range	110 mm



NOVUS SlatWall support arm

- High-quality monitor support arm for mounting on an organisation wall
- For mounting in a single slot
- Classy aluminium finish with anodised surfaces
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Obligatory supplement is a SlatWall element

Art.No.	962+0119+004
Color	 silver / anthracite
Capacity (monitor weight)	10 kg
Range	300 mm



NOVUS SlatWall-folding arm II



- High-quality 2-part monitor arm for mounting a monitor directly to an organisational wall
- For mounting in a single slot
- Classy aluminium finish with anodised surfaces
- Easy mounting of the monitor by QuickRelease, suitable for VESA standard 75/100
- Obligatory supplement is a SlatWall element


Art.No.	964+0119+014
Color	 silver / anthracite
Capacity (monitor weight)	10 kg
Range	445 mm



YOUR WORK & LIFE

The Novus and Dahle brands are part of the internationally operating emco Group. With its four brands under one umbrella, the corporation offers a broad and versatile range of products to serve the architecture, worklife and mobility markets worldwide, presenting itself as a leading provider of tailor-made technology and design solutions.

Buildings such as this hotel are made up of several areas: the lobby, guest rooms, wellness oasis, technical and office spaces. Each area has different requirements regarding hygiene, comfort, design and functionality. emco Group offers beautiful and well thought-out products to improve your home, your life and your work.

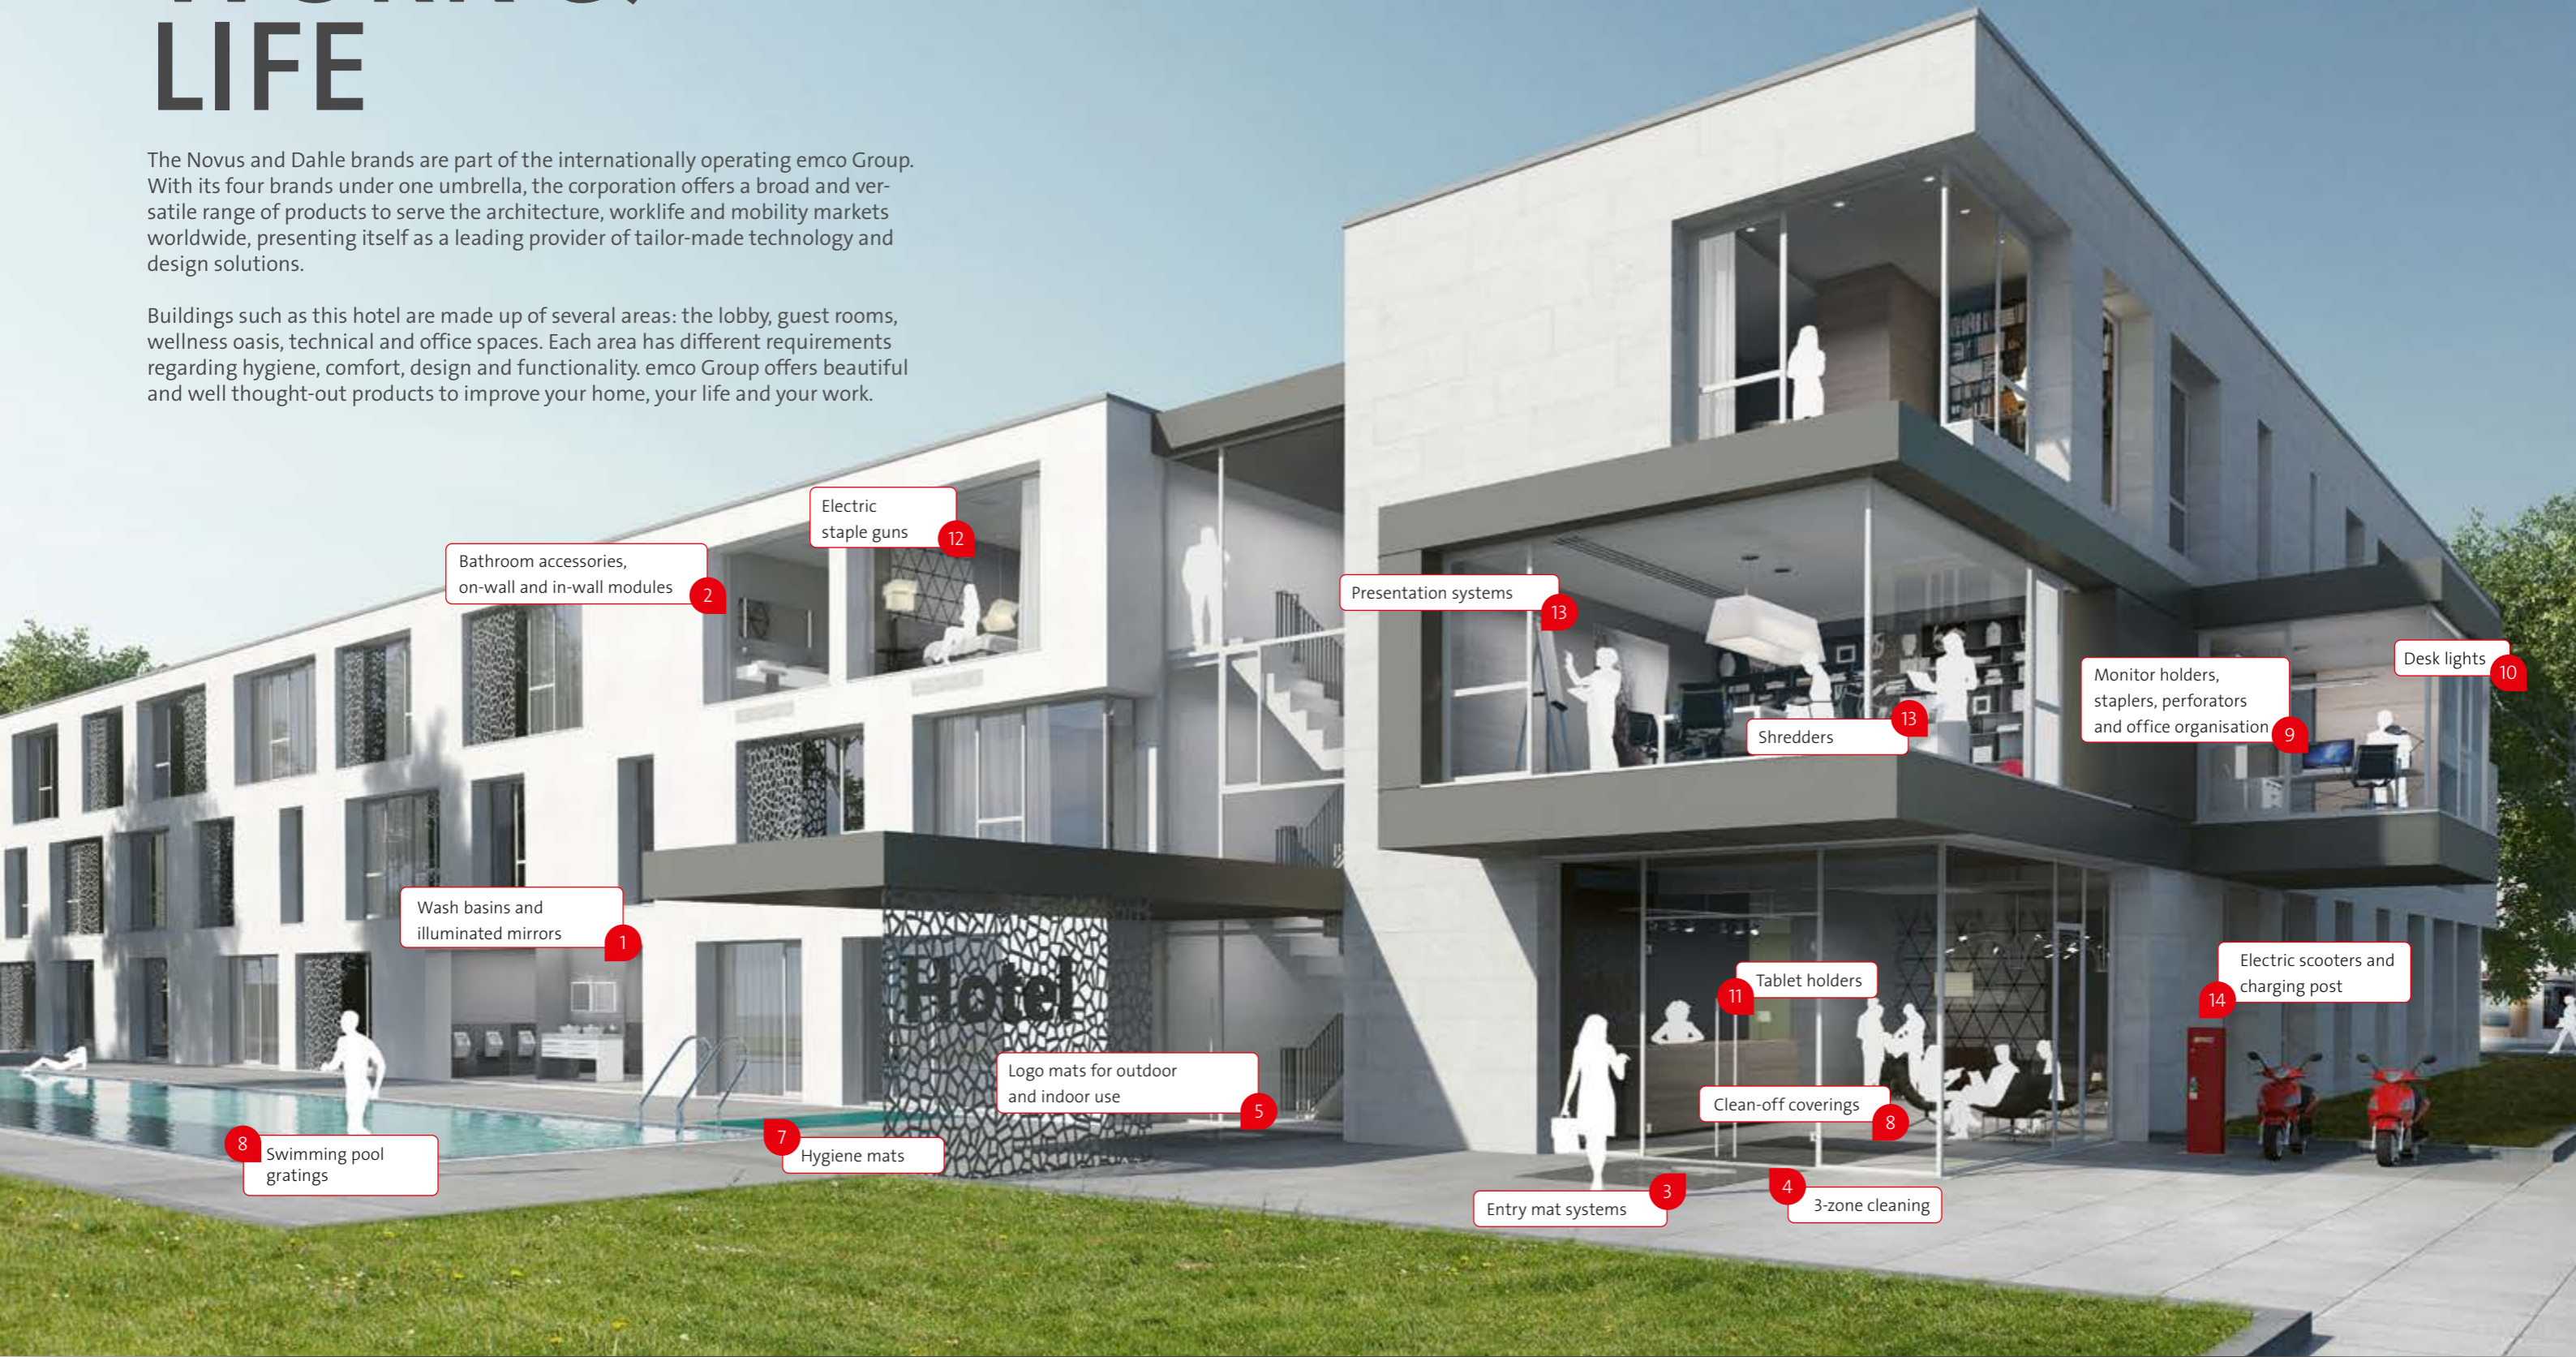

Monitor holders

– accessories



The best solution for every workstation!





NOVUS Clu Plus notebook adapter

- Practical notebook adapter for mounting on the Clu Plus X2 and X3 crossbar
- Notebook plate size (404 x 288 mm)
- Quick and easy mounting

Art.No.	795+9181+000	795+9188+000	795+9189+000
Color	 white	 black	 silver



Find out more about the whole Clu series at www.novus-more-space-system.com/clu



NOVUS activity indicator

- Visual status display for use with email and meeting software, e.g. MS Outlook, MS Teams, Zoom, Skype, etc.
- Unique visualisation solution for use with VESA standard 75/100 monitor holders
- Visualisation of user status through LED lighting (e.g. busy on video call / incoming email / do not disturb)
- Suitable for use with various monitors thanks to adjustable height
- Dimensions: W 130 mm, H 295 mm, L 10 mm
- 2 m USB cable included

Color	 anthracite
-------	--

Find out more at www.novus-more-space-system.com

Free-standing luminaires


For an active and healthy work environment – LED's work!



FIND THE PERFECT FREE-STANDING LUMINAIRE FOR YOU


It comes down to your application!

FREE-STANDING LUMINAIRES

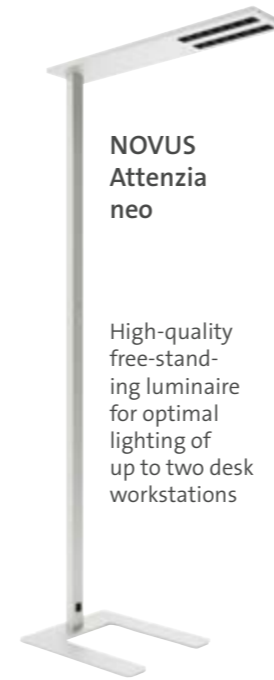

NOVUS Attenzia neo

High-quality free-standing luminaire for optimal lighting of up to two desk workstations

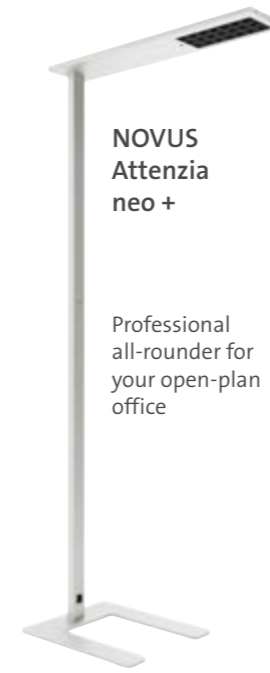


NOVUS Attenzia neo +

Professional all-rounder for your open-plan office



NOVUS Attenzia space +

Stylish luminaire for single workstations with exclusive features

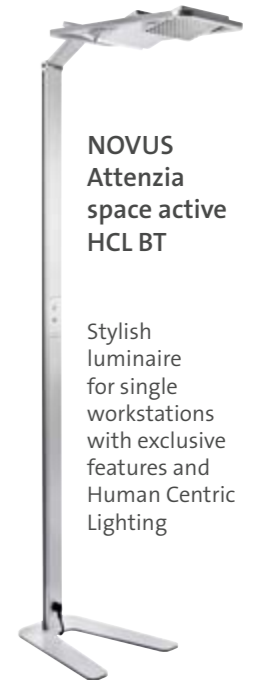

NOVUS Attenzia space active HCL BT

Stylish luminaire for single workstations with exclusive features and Human Centric Lighting

Applications

For single and double workstations, open-plan offices, home offices



For single and double workstations, open-plan offices, home offices



For single workstations



For single workstations in smart offices, workstations without natural light or day and night workstations



Color

silver, white, black

silver, white, black

silver, white, black

silver, white, black

Colour temperature in kelvin

3.000 / 4.000

3.000 / 4.000

3.000 / 4.000

2.700 - 6.500 (HCL biodynamisches Licht)

Features

- High luminaire luminous flux of 12,000 / 12,167 lm for perfect lighting conditions
- Extremely energy efficient at luminaire luminaire efficiency with 130 / 133 lm/W
- The luminaire can be dimmed to any level

- Presence and light sensor
- Direct and indirect light (percentage 25/75)
- Homogeneous illumination thanks to a high luminaire luminous flux (11,900/12,421 lm)
- Highly energy-efficient with a light output (139/146 lm/W)
- Infinitely dimmable

- Presence and light sensor
- Direct and indirect light (adjustable independently)
- Three rotatable light panels
- dimmable

- Presence and light sensor
- Direct and indirect light
- Three rotatable light panels
- dimmable
- Bluetooth function
- app control
- Biodynamic Light (HCL)

NOVUS Attenzia neo



- High-quality free-standing luminaire for optimal lighting of up to two desk workstations in block arrangement
- Material mix of aluminium (luminaire head / column) and steel (base)
- The luminaire can be dimmed to any level
- Easy automatic operation thanks to presence and light detection via the multisensor
- In high-quality metal with powder-coated finish
- Kettle plug with a cable length of 2 m
- This product contains a light source rated energy efficiency class C and D (3.000 K) or B and C (4.000 K) (range A to G).

Art.No.	730+7001+000	730+7008+000	730+7009+000	740+7001+000	740+7008+000	740+7009+000
Color	white	black	silver	white	black	silver
Colour temperature	3000 K (warm white)	3000 K (warm white)	3000 K (warm white)	4,000 K (neutral white)	4,000 K (neutral white)	4,000 K (neutral white)
ENEC certified	✓	✓	✓	✓	✓	✓
Leuchtenlichtstrom	12.000 lm	12.000 lm	12.000 lm	12.167 lm	12.167 lm	12.167 lm
Colour rendering index	80	80	80	80	80	80
Energy consumption	87 kWh / 1,000 h	87 kWh / 1,000 h	87 kWh / 1,000 h	87 kWh / 1,000 h	87 kWh / 1,000 h	87 kWh / 1,000 h



Available from autumn 2022. Find out more at www.novus-more-space-system.com

NOVUS Attenzia neo +



- High-quality free-standing luminaire for optimal lighting of up to two desk workstations in block arrangement
- Material mix of aluminium (luminaire head / column) and steel (base)
- The luminaire can be dimmed to any level and switches off automatically
- Easy automatic operation thanks to presence and light detection via the multisensor
- In high-quality metal with powder-coated finish
- Kettle plug with a cable length of 2 m
- This product contains a light source rated energy efficiency class C and D (3.000 K) or B and C (4.000 K) (range A to G).

Art.No.	730+7001+000	730+7008+000	730+7009+000	740+7001+000	740+7008+000	740+7009+000
Color	white	black	silver	white	black	silver
Colour temperature	3000 K (warm white)	3000 K (warm white)	3000 K (warm white)	4,000 K (neutral white)	4,000 K (neutral white)	4,000 K (neutral white)
ENEC certified	✓	✓	✓	✓	✓	✓
Luminaire luminous flux	11.900 lm	11.900 lm	11.900 lm	12.421 lm	12.421 lm	12.421 lm
Colour rendering index	80	80	80	80	80	80
Energy consumption	87 kWh / 1,000 h	87 kWh / 1,000 h	87 kWh / 1,000 h	87 kWh / 1,000 h	87 kWh / 1,000 h	87 kWh / 1,000 h





NOVUS Attenzia space active HCL BT



- Smart designed free-standing LED luminaire with unique, rotatable light panels for individually adjustable direct and indirect light options, and a practical multi-purpose sensor for automatic operation.
- Easily configure all light settings via Bluetooth from your smartphone with the Lumobi app. The app is available free of charge from your phone's app store.
- Human-centric lighting – biodynamic lighting that complements the natural rhythm of daylight. The natural lighting is complemented perfectly by intelligent light technology, which varies the illuminance and colour temperature over the course of the day based on the natural sunlight.
- Easy automatic operation thanks to presence and light detection via the multisensor
- The direct and indirect light is independently dimmable
- Dimensions: W 394 mm, H 1962 mm, D 709 mm
- High-quality aluminium finish with anodised and galvanised surfaces (silver) and premium-quality painted surfaces in black and white
- Kettle plug with a cable length of 2 m
- This luminaire is sold with a bulb of the energy class D.

Art.No.	740+6191+001	740+6198+001	740+6199+001
Color	white	black	silver
Colour temperature	2500–6500 K	2500–6500 K	2500–6500 K
ENEC certified	✓	✓	✓
Luminaire luminous flux	10,600 lm	10,600 lm	10,600 lm
Colour rendering index	84	84	84
Energy consumption	93 kWh / 1,000 h	93 kWh / 1,000 h	93 kWh / 1,000 h



Can be operated via Bluetooth using the LUMOBI app! Find out more at www.novus-more-space-system.com/attenzia



NOVUS Attenzia space +

- Smart designed free-standing LED luminaire with unique, rotatable light panels for individually adjustable direct and indirect light options, and a practical multi-purpose sensor for automatic operation.
- All panels are switchable and dimmable
- Easy automatic operation thanks to presence and light detection via the multisensor
- Dimensions: W 394 mm, H 1962 mm, D 709 mm
- High-quality aluminium finish with anodised and galvanised surfaces (silver) and premium-quality painted surfaces in black and white
- Kettle plug with a cable length of 2 m
- Optional remote control also available
- This product contains a light source rated energy efficiency class C (range A to G).

Art.No.	730+4191+000	730+4198+000	730+4199+000	740+4191+000	740+4198+000	740+4199+000
Color	white	black	silver	white	black	silver
Colour temperature	3000 K (warm white)	3000 K (warm white)	3000 K (warm white)	4,000 K (neutral white)	4,000 K (neutral white)	4,000 K (neutral white)
ENEC certified	✓	✓	✓	✓	✓	✓
Luminaire luminous flux	9,500 lm	9,500 lm	9,500 lm	10,300 lm	10,300 lm	10,300 lm
Colour rendering index	85	85	85	85	85	85
Energy consumption	93 kWh / 1,000 h	93 kWh / 1,000 h	93 kWh / 1,000 h	93 kWh / 1,000 h	93 kWh / 1,000 h	93 kWh / 1,000 h



Also available as desk-mount option, find out more at www.novus-more-space-system.com/attenzia

Task lights

Improve concentration – LED's focus!



FIND THE RIGHT TASK LIGHT FOR YOU

The Attenzia workstation luminaires guarantee perfect lighting no matter how you move at your desk – forwards, backwards, side-to-side, upwards or downwards. The light's slimline, height-adjustable support arm allows you to move it however you like, wherever you like. This makes the NOVUS Attenzia task and the NOVUS Attenzia complete just as flexible as you are at your workstation, giving you light exactly where you need it.



NOVUS Attenzia task, with base

- Smart LED desktop luminaire with slim-line 2-part aluminium support arm and internal cable routing
- The luminaire can be dimmed to any level and switches off automatically
- High-quality aluminium finish with anodised and galvanised surfaces (silver) and premium-quality painted surfaces in black and white
- Elegant desktop feet for placement on the desk
- Light fitted with LED lights
- Lamps cannot be replaced within the light

Art.No.	730+1291+000	730+1298+000	730+1299+000	740+1291+000	740+1298+000	740+1299+000
Color	white	black	silver	white	black	silver
Range	1015 mm	1015 mm	1015 mm	1015 mm	1015 mm	1015 mm
Colour temperature	3000 K (warm white)	3000 K (warm white)	3000 K (warm white)	4,000 K (neutral white)	4,000 K (neutral white)	4,000 K (neutral white)
ENEC certified	✓	✓	✓	✓	✓	✓
Luminaire luminous flux	max. 918 lm	max. 918 lm	max. 918 lm	max. 918 lm	max. 918 lm	max. 918 lm
Colour rendering index	86	86	86	86	86	86
Illuminance (E)	1,586 LUX	1,586 LUX	1,586 LUX	1,586 LUX	1,586 LUX	1,586 LUX
Cable length	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m





NOVUS Attenzia task with pin (Ø 13 mm)

- Smart LED desktop luminaire with slim-line 2-part aluminium support arm and internal cable routing
- The luminaire can be dimmed to any level and switches off automatically
- High-quality aluminium finish with anodised and galvanised surfaces (silver) and premium-quality painted surfaces in black and white
- Light fitted with LED lights
- Lamps cannot be replaced within the light

Art.No.	730+1201+000	730+1208+000	730+1209+000	740+1201+000	740+1208+000	740+1209+000
Color	white	black	silver	white	black	silver
Range	1015 mm	1015 mm	1015 mm	1015 mm	1015 mm	1015 mm
Colour temperature	3000 K (warm white)	3000 K (warm white)	3000 K (warm white)	4,000 K (neutral white)	4,000 K (neutral white)	4,000 K (neutral white)
ENEC certified	✓	✓	✓	✓	✓	✓
Luminaire luminous flux	max. 918 lm	max. 918 lm	max. 918 lm	max. 918 lm	max. 918 lm	max. 918 lm
Colour rendering index	86	86	86	86	86	86
Illuminance (E)	1,586 LUX	1,586 LUX	1,586 LUX	1,586 LUX	1,586 LUX	1,586 LUX
Cable length	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m



NOVUS Attenzia task, with clamp 1

- Smart LED desktop luminaire with slim-line 2-part aluminium support arm and internal cable routing
- The luminaire can be dimmed to any level and switches off automatically
- High-quality aluminium finish with anodised and galvanised surfaces (silver) and premium-quality painted surfaces in black and white
- Table clamp for a tabletop thickness of 10–50 mm
- Light fitted with LED lights
- Lamps cannot be replaced within the light

Art.No.	730+1211+000	730+1218+000	730+1219+000	740+1211+000	740+1218+000	740+1219+000
Color	white	black	silver	white	black	silver
Range	1015 mm	1015 mm	1015 mm	1015 mm	1015 mm	1015 mm
Colour temperature	3000 K (warm white)	3000 K (warm white)	3000 K (warm white)	4,000 K (neutral white)	4,000 K (neutral white)	4,000 K (neutral white)
ENEC certified	✓	✓	✓	✓	✓	✓
Luminaire luminous flux	max. 918 lm	max. 918 lm	max. 918 lm	max. 918 lm	max. 918 lm	max. 918 lm
Colour rendering index	86	86	86	86	86	86
Illuminance (E)	1,586 LUX	1,586 LUX	1,586 LUX	1,586 LUX	1,586 LUX	1,586 LUX
Cable length	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m



NOVUS Attenzia complete, with base plate



- Smart designed LED desk-top luminaire with slim aluminium support arm and internal cable routing for illuminating the entire work space
- The luminaire can be dimmed to any level and switches off automatically
- High-quality aluminium finish with anodised and galvanised surfaces (silver) and premium-quality painted surfaces in black and white
- Light fitted with LED lights
- Lamps cannot be replaced within the light

Art.No.	730+2191+000	730+2198+000	730+2199+000	740+2191+000	740+2198+000	740+2199+000
Color	white	black	silver	white	black	silver
Colour temperature	3000 K (warm white)	3000 K (warm white)	3000 K (warm white)	4,000 K (neutral white)	4,000 K (neutral white)	4,000 K (neutral white)
ENEC certified	✓	✓	✓	✓	✓	✓
Luminaire luminous flux	max. 1,708 lm	max. 1,708 lm	max. 1,708 lm	max. 1,708 lm	max. 1,708 lm	max. 1,708 lm
Colour rendering index	86	86	86	86	86	86
Cable length	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m



NOVUS Attenzia complete with pin (Ø 13mm)

- Smart designed LED desk-top luminaire with slim aluminium support arm and internal cable routing for illuminating the entire work space
- The luminaire can be dimmed to any level and switches off automatically
- Classy aluminium finish with anodised and galvanised surfaces
- For fitting to a NOVUS MY column, supplied without mount
- Light fitted with LED lights
- Lamps cannot be replaced within the light

Art.No.	730+2109+000	740+2109+000
Color	silver	silver
Range	726 mm	726 mm
Colour temperature	3000 K (warm white)	4,000 K (neutral white)
ENEC certified	✓	✓
Luminaire luminous flux	max. 1,708 lm	max. 1,708 lm
Colour rendering index	86	86
Illuminance (E)	1,714 LUX	1,714 LUX
Cable length	approx. 2 m	approx. 2 m





Luminaire accessories

Perfect for all workstations!



NOVUS Attenzia complete, with organisation wall mount

- Smart designed LED desk-top luminaire with slim aluminium support arm and internal cable routing for illuminating the entire work space
- The luminaire can be dimmed to any level and switches off automatically
- High-quality aluminium finish with anodised and galvanised surfaces (silver) and premium-quality painted surfaces in black and white
- Attachment to organisation wall via SlatWall adapter
- Light fitted with LED lights
- Lamps cannot be replaced within the light

Art.No.	730+2171+000	730+2178+000	730+2179+000	740+2171+000	740+2178+000	740+2179+000
Color	white	black	silver	white	black	silver
Range	726 mm	726 mm	726 mm	726 mm	726 mm	726 mm
Colour temperature	3000 K (warm white)	3000 K (warm white)	3000 K (warm white)	4,000 K (neutral white)	4,000 K (neutral white)	4,000 K (neutral white)
ENEC certified	✓	✓	✓	✓	✓	✓
Luminaire luminous flux	max. 1,708 lm	max. 1,708 lm	max. 1,708 lm	max. 1,708 lm	max. 1,708 lm	max. 1,708 lm
Colour rendering index	86	86	86	86	86	86
Illuminance (E)	1,714 LUX	1,714 LUX	1,714 LUX	1,714 LUX	1,714 LUX	1,714 LUX
Cable length	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m	approx. 2 m





NOVUS Attenzia system rail mounting

- Steel plate with aluminium casing
- System rail mount for use in various system rails of the office furniture industry

Art.No.	798+0006+000
Mounting option	System rail attachment
Color	<input type="checkbox"/> white <input checked="" type="checkbox"/> silver



NOVUS Attenzia SlatWall adapter

- SlatWall adapter to mount various products on organisation rails
- Suitable for organisation walls with 1 or 2 slots
- Compatible with Attenzia task and complete, and products with Ø 13 mm insertion pins

Art.No.	798+0071+000	798+0078+000	798+0079+000
Color	<input type="checkbox"/> white <input checked="" type="checkbox"/> black <input type="checkbox"/> silver		



NOVUS Attenzia Wall Mount Adapter

- Adapter for wall mounting
- Compatible with Attenzia task and complete, and products with Ø 13 mm insertion pins

Art.No.	798+0081+000	798+0088+000	798+0089+000
Color	<input type="checkbox"/> white <input checked="" type="checkbox"/> black <input type="checkbox"/> silver		



NOVUS Attenzia bushing

- Metal insert sleeve for mounting the Attenzia task to the table
- Visible outer diameter of Ø 35 mm
- For desktop thicknesses from 5 to 45 mm
- For bolts of Ø 13 mm

Art.No.	798+0008+000
Color	<input checked="" type="checkbox"/> black



pCon.planner

Room planning made simple

Professional planning with the pCon.planner and the Novus More Space System



Integrate the products from the Novus more space system into your room planning: Our 3D data is available to you in the pCon.planner. The new standard for quick, simple room planning and quote calculation makes it easy to achieve complex requirements.

Generating quotations is easy!

pCon.planner combines visual planning with the quotation in a single step. In addition to product information and 3D data, the software contains prices and quotation texts. This way, pCon.planner simplifies the generation of quotes considerably and frees up space for other important tasks.

High-quality 3D illustrations

The 3D rendering in pCon.planner delivers impressive results! With high-quality visualisation, impress customers as early as the planning

phase. As a result, you have the opportunity to recognise potential for optimisation early and prevent reworking.

You can find all Novus DWG/OFML® data in the pCon.catalog!

Find the link and more information on the pCon.planner at www.novus-more-space-system.com



Novus Dahle GmbH
Breslauer Straße 34 - 38
49808 Lingen (Ems)
Germany
Tel. +49 (0) 591 9140-0
Fax +49 (0) 591 9140-841
info@novus-dahle.com

www.novus-dahle.com

855-2626 | 0123 EN
Technical information and design are
approximate and subject to change.



Das Zeichen für verantwortungsvolle
Waldwirtschaft



Part of the